



MINIROLL

Streamline your product handling with Miniroll. A simple, innovative and cost-effective system designed to improve carton flow and optimise storage space. Popular for use in live pallet racking applications and first in first out (FIFO) storage systems, this robust wheel track is easy to install to instantly improve efficiencies.

Features & Benefits


- **Easy to Install** - comes in standard 2.4m lengths with a range of accessories available for you to easily mount in place.
- **Durable** - robust galvanised steel track with zinc plated steel axels for longer wear.
- **Optimise Storage Space** - with free running polypropylene wheels you can easily store goods in hard to reach places.
- **Quick ROI** - with very little set up cost, you can almost instantly begin to experience the benefits.
- **Move cartons and product efficiently** with single or double wheel track available for small or irregular shaped products.



Common Uses

Commonly used in the below applications, the options are almost endless

- Live Racking / Storage
- Package Handling and Carton Flow
- First in First out (FIFO) Storage Systems
- Live Picking Shelves
- Empty Carton Transfer
- Side Guide Rails
- Communication between workstations
- Flow of material onto machinery
- Supply to assembly tables

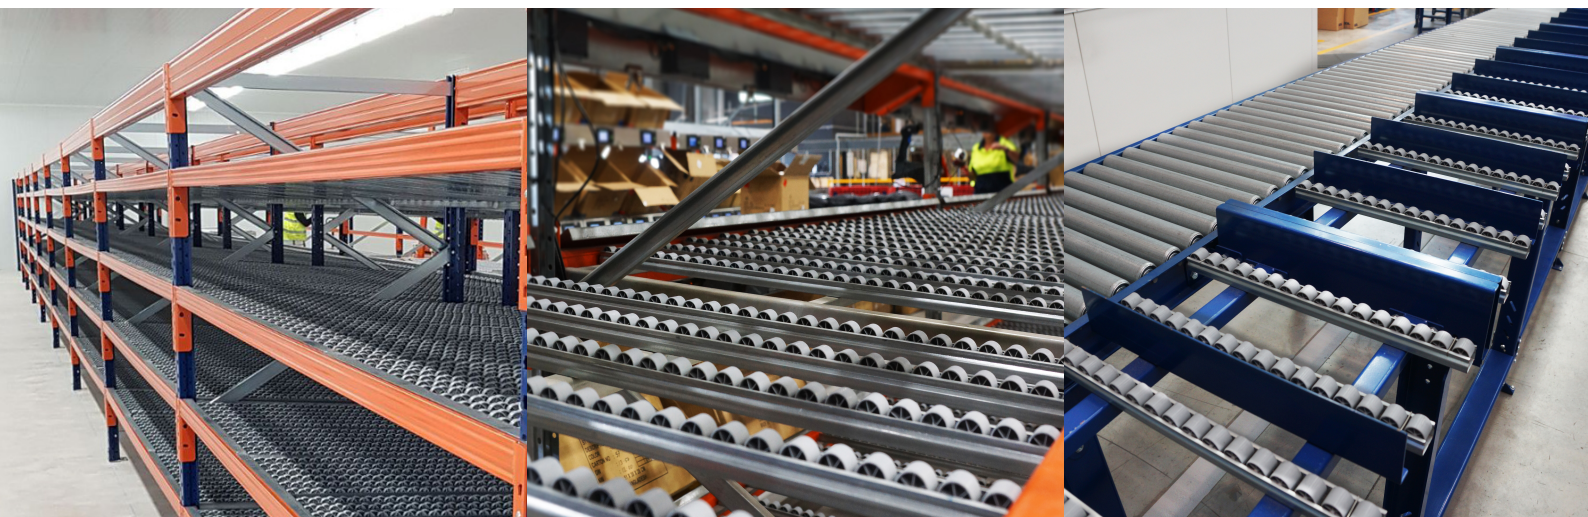



MINIROLL

Specifications

Dimensions

Length: 2376mm

Width: 36mm

Height: 35mm (Top of Wheel)



Customisation available

Frame Construction

Galvanised Steel


Wheels

- Ø28mm Polypropylene Wheels
33mm Pitch (Standard)
16.5mm Pitch (Double)
- Ø3mm Zinc Plated Steel Axels
- Max load per wheel 20kg

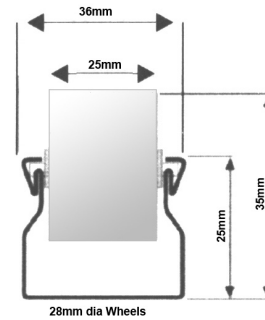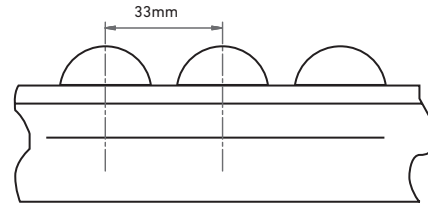


Load Rating

Span with two supports (mm)	Max Load per rail (kgs)
600	70
700	50
800	40
900	30
1000	25
1100	20
1200	18
1300	15
1400	12
1500	10

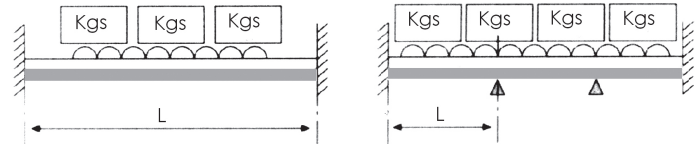


Span with more than two supports (mm)	Max Load per rail (kgs)
570	100
660	80
800	70
1000	50
1330	25

Optional Extras



Non-Return

Prevents the goods from rolling backwards.




Mounting Clip

Attaches to cross bars from 2-4mm thick.




Strengthening Clip

Prevents channel opening under heavy loads.



Braking Ramp

Adds friction to slow down product flow.



Joiner

Join tracks together easily and keep in line.

**Need to boost your productivity & profitability?
Call us now - 0800 144 044**