




# EZYROLL

Dyno's gravity roller conveyors efficiently convey goods from A to B, seamlessly and safely. Standard 1.2m or 2.4m sections, but any lengths can be catered for, as well as bends. We construct these to order, so can cater to all your needs. From stainless to galvanized to PVC rollers and Powder Coated frames, we have it covered! 50mm diameter rollers are standard, but other sizes can be accommodated for.



## Features & Benefits

- 1.2m and 2.4m sections
- Multiple roller spacings
- A range of rollers to suit application.
- Bolt together construction
- Widths up to 1000mm (standard)
- A Range of Finish options: Powder Coated, Powder Coated with Zinc rich primer, Hot Dip Galvanised, Stainless Steel

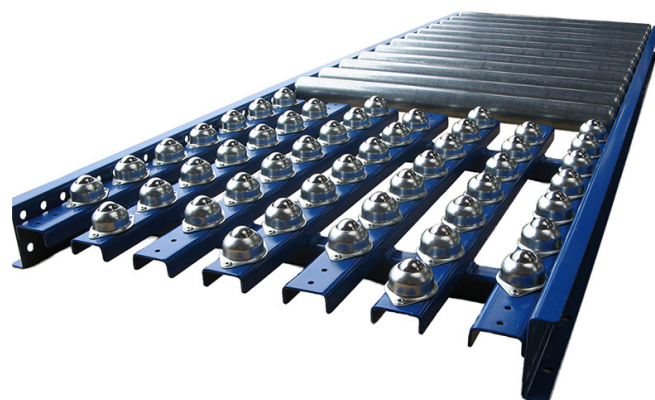

## Uses

- Carton and Crate Conveying
- Infeed/Outfeed Conveyor

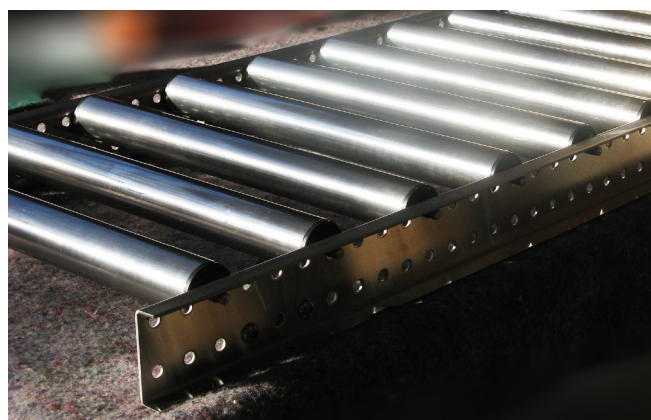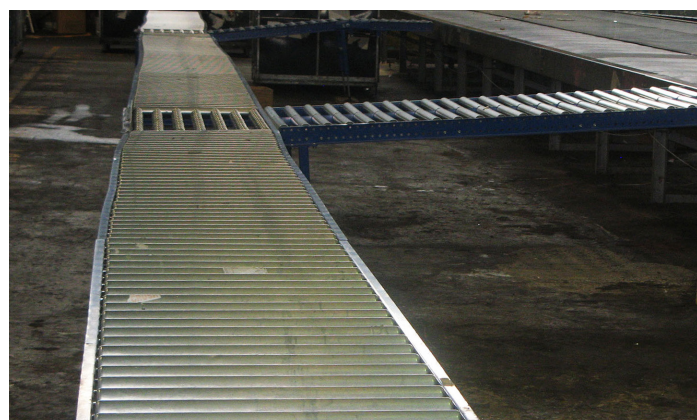

Auckland 09 320 5535  
 Canterbury 03 307 0044  
 Southland 03 216 1440

Freephone 0800 144 044  
 Email [sales@dyno.co.nz](mailto:sales@dyno.co.nz)  
[www.dyno.co.nz](http://www.dyno.co.nz)



It's how businesses get along