XPANDAROLL

Achieve more with less - stretch and twist the Xpandaroll Conveyor to take your products wherever you need them. Cartons simply follow the twist and turns of the conveyor path without the need for side rails or engineered curves. Ideal for changeable product runs in dispatch and trailer loading and devanning this conveyor can easily be pulled out when needed then folded away for storage.

Features & Benefits

- Robust Construction with high tensile ribbed aluminium side plates and channel spanning entire conveyor width for added strength.
- Save on valuable floor space when not in use, conveyor folds down to 1.6m.
- Build to any required length with easy clip-on connecting brackets.
- Product self-tracks with free running skate wheels guiding product.
- Adjustable height, simply turn the locking knob to raise or lower the conveyor bed height.
- Easily move conveyor around with fully lockable castor wheels

Specifications

Total Length Expanded: 6,000mm Total Length Compacted: 1,600mm

Working Width: 600mm

Height Adjustable: 690mm - 1,000mm

Frame Construction: High Tensile Ribbed Aluminium Side


Plates

Stand Construction: Powder Coated (Black) Steel Skatewheels: Ø50mm Zinc Plated Steel Skatewheels

Fully Lockable Castor Wheels

Connecting Brackets, easily clip multiple conveyors together

Max Load Rating: 250kg/m

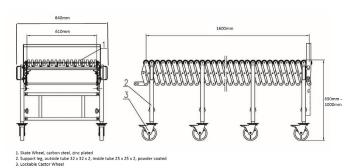

Common Uses

- Dispatch Areas
- Courier parcel handling
- Truck loading and devanning
- · Distribution centers
- Mobile assembly lines
- Inwards Goods









