


600 Tube Diameter - 60.3mm

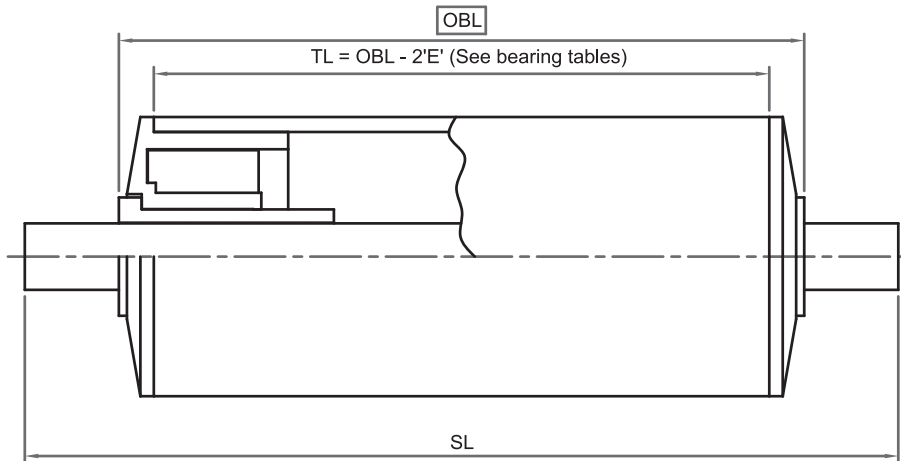

Tube		Bearings		Shaft Materials	
Materials	60.3 x 2.8 PVC (50PN9)	Materials	Bushed type	Materials	Mild steel
			White ABS housing		Stainless steel
			White acetal bush up to 10mm	Size	Standard - Ø8, Ø9.5mm
			Black nylon bush over 10mm		Option - Ø6, Ø10, Ø11, Ø12mm
			Blind bushes - see bearing tables	Type	Standard - SP
					Options - DL, F, L, MT

- Load Rating kg (Minimum applies).

Roller Length (mm)	Tube Material Plastic	Shaft			
		Ø6mm	Ø8mm	Ø10mm	Ø12mm
100	35	30	35	35	35
200	35	20	35	35	35
300	25	10	30	35	35
400	20	2	25	35	35
500	18	1	20	35	35
600	12		15	35	35
700	10		10	30	35
800	7			25	35
900	5			20	35
1000	2			10	35
1100					35
1200					35

* Shaded sizes not recommended

- Rated speed 20m/min (speed can be increased with decreased load).
- Max. static load 30kg.
- For central point load, reduce load rating by 1/3.
- Note; extra heavy duty, 19mm shaft available (special order).

Common uses;

- General purpose gravity rollers.
- Belt supports.
- Food factories.
- Fruit elevators.